


Beam

Beam Hanger Installation Instructions

General Tools and Materials:


 Beam Hanger	 Loctite® PL® Premium® 3X Construction Adhesive	 Caulk Gun	 Caulk or Permanent Marker	 Screw Gun / Drill Driver & Bits	 Drywall Screws
 Utility Knife	 Ladder	 Clean Cloth	 Pencil	 Safety Glasses	 Square/ T-Bevel

WARNINGS:

- Be sure to obey all safety rules and recommendations set forth by tool manufacturers.
- Wear safety glasses during the entire installation process.
- Always comply with clearances set forth by the manufacturer of stoves, fireplaces, furnaces, and any other heat source.

1 Determine Mounting Location

1. Hold the strap to the desired location. If the strap is too long use a utility knife and straight edge to trim it to size.
2. If you plan to add faux fasteners to the hanger, mark the desired location on the hanger. It is a good idea to add the screws in step 3 to the marked locations so that the faux fasteners can cover up any screw holes.

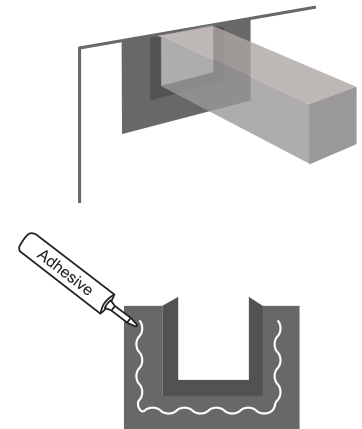


2 Apply Adhesive

Apply a ¼" bead of adhesive to the back of the hanger, avoiding the edges.


3 Install Hanger

1. Line the strap up at the installation location. Press firmly on the hanger working from the bottom of the beam then up the sides to ensure good contact.
2. Screw the strap to the beam.
3. Wipe any excess adhesive with a clean cloth.

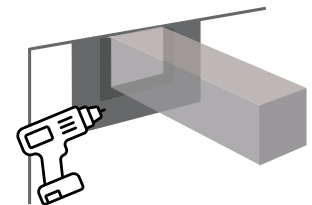

4 Touch-Up

1. Look at the hanger from the ground. If the hanger is not laying flat install additional screws.
2. If screw heads are visible, hide them using black caulk or permanent marker.

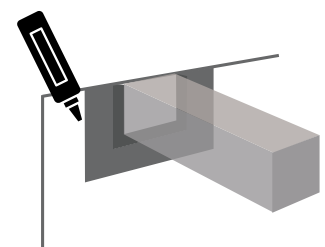

5 Fasteners

Add faux fasteners by adding a small dab of adhesive to the back and pressing firmly to the hanger. (optional)